


# i-Dentify™ ID-1501

## Kiosk Authentication Scanner

The ID-1501 is a full-color, 600 dpi, duplex scanner that scans the front and back of a card in one simple operation.

The ID-1501 quickly and accurately verifies government issued identity documents from all over the world including driver's licenses from all 50 US states, military IDs, and alien registration cards. The ID-1501 enables ID verification to be integrated into self-service kiosk applications, reducing fraud, while maintaining a high level of customer service.

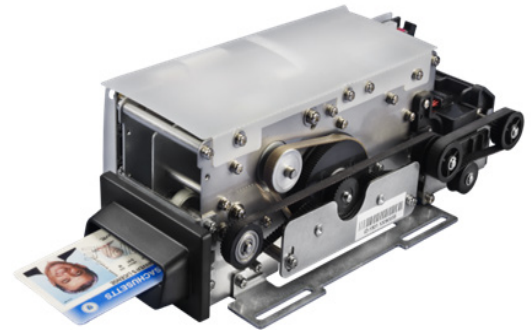

- High-quality Image 600 dpi
- Duplex Scanning Technology
- High-use Applications & Harsh Environment
- Fast Scan Time, 6 seconds or Less
- Low-Maintenance, Continuous Reliable Operations

### Technical Specifications

ID Card Size	Width: 53.5-54.9 (ISO specification 53.92-54.18) Length: 85-86mm (ISO specification 85.47-85.90) Thickness: 0.4-1.0mm (ISO specification 0.68-0.84)
Scanning Side Illumination	Front: RGB (470/530/620nm) Rear: RGB (465/520/630nm) Near-Infrared: 880nm
Sensor	Front: Color/NIR CIS Rear: Color CIS
Scan Width	54mm
Resolution	600 dots per inch (dpi)
Color	24-bit RGB color, 8-bit grayscale (NIR)
Scan Speed	42mmsec @ 600dpi
Magnetic Stripe Reader Track	ISO7811 3 Track, US/Canada Driver License format (AAMVA)
Interface Type	USB 2.0 High Speed (480 Mbps)
Dimensions	118W x 293.2D x 88H (mm)
Weight	1.7 kg (3.75 lb)
Power Input	DC24V, 1.75A
Environment Operating Storage	0-40°C; 10-85% RH, non-condensing 7-49°C; 10-98% RH, non-condensing
Radio Frequency	This device complies with Part 15 of the FCC Rule
Interference	Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.